

A

B




C

D

E

F

REV	DESCRIPTION	DESIGN	DATE
A0	Release	吴丹平	2016.06.15

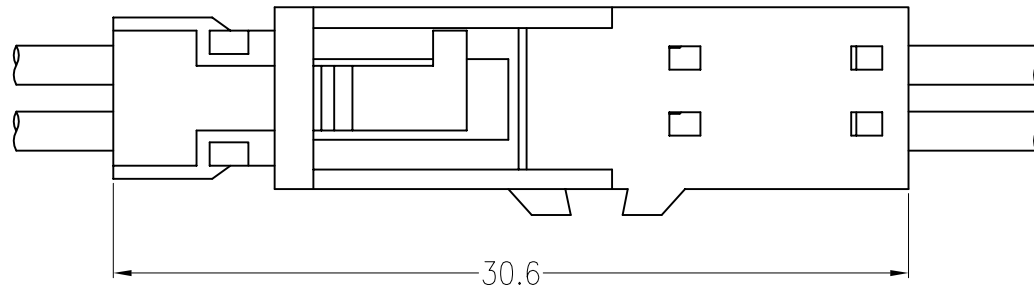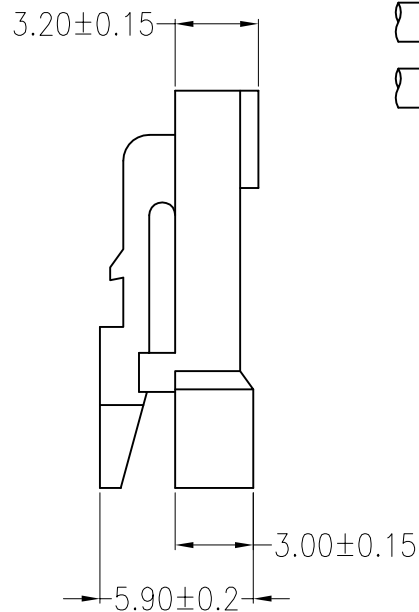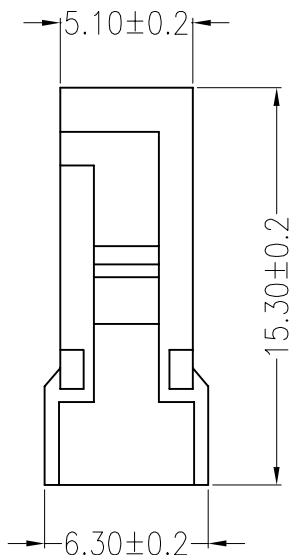



Assembly Layout

主要技术参数 Main Specifications

线数 (Poles): 02
 接触电阻 (Contact resistance): $\leq 20m\Omega$
 绝缘电阻 (Insulation resistance): $\geq 1000M\Omega$
 额定电压 (Rated voltage): 250V AC DC
 额定电流 (Rated current): 3.0A AC DC
 耐电压 (Withstand Voltage): 1500V AC/minute
 温度范围 (Temperature Range): $-25^{\circ}C \sim +85^{\circ}C$

ORDER INFORMATION:

C2543P-02-A6K-P-1			
PART No.		PACKAGING:	1=大口
No. OF CIRCUITS:	02	PACKAGING:	P=PE
		PLASTIC MATERIAL:	A6K=PA66 (BLACK)

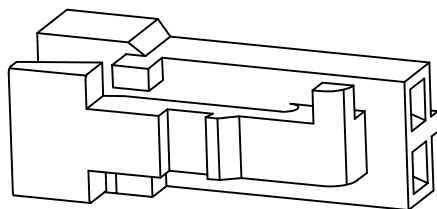

ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
C				
B				
A	PEDESTAL	1 PCS	PA66	
JKUN 温州健坤接插件有限公司 WENZHOU JKUN CONNECTOR CO., LTD.				TITLE: -
X.±0.5	X.±5'	USE:	CUSTOMER	PART NO.:
.X±0.3	.X±2'	APPD:	邵敬和	C2543P-02-A6K-P-1
.XX±0.25	.XX±1'	CHKD:	田峰	DWG NO.:
--	--	DR:	蒋建银	JKUN/GCCP-0606
	UNITS:			SCALE
	mm			1 : 1
				SHEET
				1 / 1

A

B

C

D

E

F

1

2

3

4

5

1

2

3

4

5