


REV	ECN No.	DESCRIPTION	DESIGN	DATE
A0		Release	蒋建银	2017.12.01

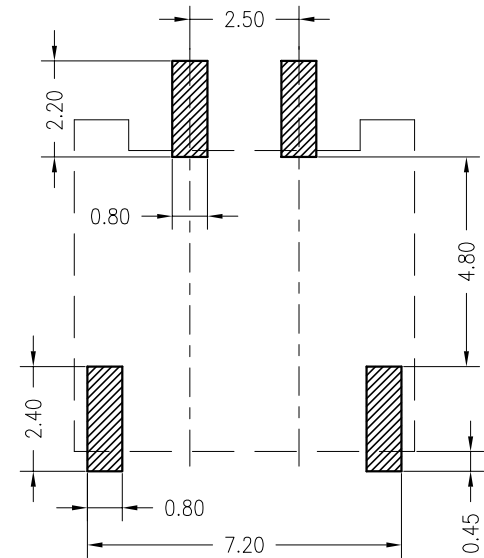

Board Layout

ORDER INFORMATION:

A2503AWR-02-F4MB1-R

PART No. _____
 Number of electrodes: _____
 PLASTIC MATERIAL: F4M=LCP(BEIGE)

PACKAGING: B=PEEL
 Metal code: 1=PhosphorBronze
 PLATING: B=MATTE Sn

主要技术参数 Main Specifications

- 线 数 (Poles): 02
- 接触电阻 (Contact resistance): $\leq 20m\Omega$
- 绝缘电阻 (Insulation resistance): $\geq 1000M\Omega$
- 额定电压 (Rated voltage): 250V AC DC
- 额定电流 (Rated current): 2.0A AC DC
- 耐 电 压 (Withstand Voltage): 1000V AC/minute
- 温度范围 (Temperature Range): $-25^{\circ}C \sim +85^{\circ}C$

C	SOLDER TAB	2 PCS	PhosphorBronze	MATTE SN
B	CONTACT	2 PCS	PhosphorBronze	MATTE SN
A	HOUSING	1 PCS	LCP	UL 94V-0, COLOR:BEIGE
ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
JKUN 温州健坤接插件有限公司 WENZHOU JKUN CONNECTOR CO., LTD.				TITLE: - 2.5mmPITCH 90°WAFER SMT TYPE
X.±0.5	X.±5°	USE: CUSTOMER APPD: 谭龙清 CHKD: 田峰 DR: 蒋建银	PART NO.: A2503AWR-02-F4MB1-R	
.X±0.3	.X±2°		DWG NO.: JKUN/GCCP-0741	
.XX±0.25	.XX±1°		SCALE: 1 : 1	
--	--		SHEET: 1 / 1	
UNITS: mm				