

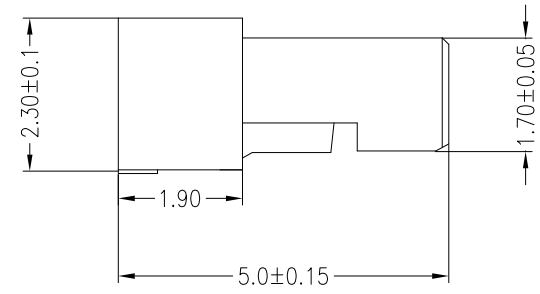
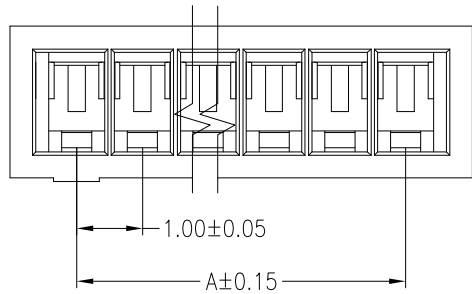


REV	DESCRIPTION	DESIGN	DATE
A0	NEW RELEASE	Steven	2019/05/09

线数 (N)	尺寸 mm	
	A	B
2	1.00	2.40
3	2.00	3.40
4	3.00	4.40
5	4.00	5.40
6	5.00	6.40
7	6.00	7.40
8	7.00	8.40
9	8.00	9.40
10	9.00	10.40
11	10.00	11.40
12	11.00	12.40
13	12.00	13.40
14	13.00	14.40
15	14.00	15.40

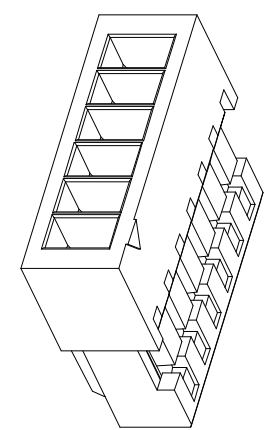

Specifications:  
 Poles: 02 to 15  
 Contact resistance:  $\leq 20m\Omega$   
 Insulation resistance:  $\geq 100M\Omega$   
 Rated voltage: 125V AC DC  
 Rated current: 1.0A AC DC  
 Withstand Voltage: 500V AC/minute  
 Temperature Range:  $-25^{\circ}C \sim +85^{\circ}C$   
 Housing: PA66 UL94V-0, Natural

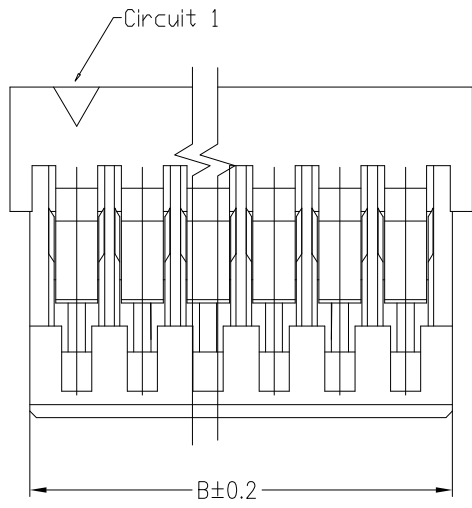

ORDER INFORMATION:

A1003Y-\*\*-A5W-P

PART No. \_\_\_\_\_  
 No.OF CIRCUITS: \_\_\_\_\_  
 \*\* \_\_\_\_\_  
 PLASTIC MATERIAL: \_\_\_\_\_  
 A5W=PA66(WHITE)

PACKAGING:  
 P=PE

<b>JKUN</b> 温州健坤接插件有限公司 WENZHOU JKUN CONNECTOR CO.,LTD.				TITLE: 1.0 Pitch HOUSING	
GENERAL TOLERANCE		USE:		PART NO.:	
X. $\pm 0.50$	X. $\pm 5^{\circ}$	CUSTOMER		A1003Y-**-A5W-P	
X.X $\pm 0.30$	X.X $\pm 2^{\circ}$	APPD: Wangliang		DWG NO.:	
X.XX $\pm 0.20$	X.XX $\pm 1^{\circ}$	CHKD: Zenglingqing		JKUN-GCCP-0850	
UNITS: mm		DR: Steven		SCALE 1 : 1	SHEET 1 / 1