
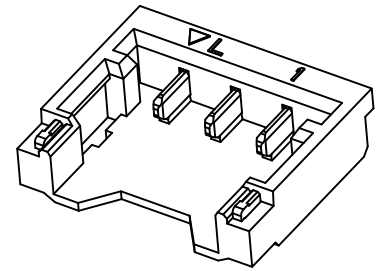
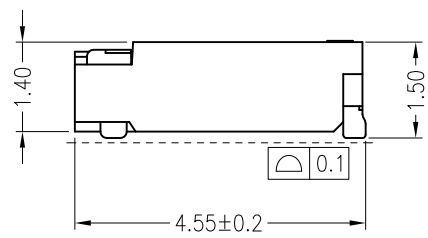
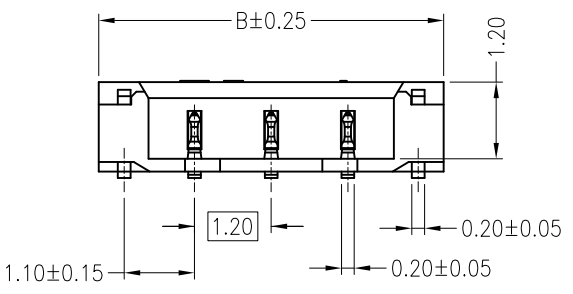
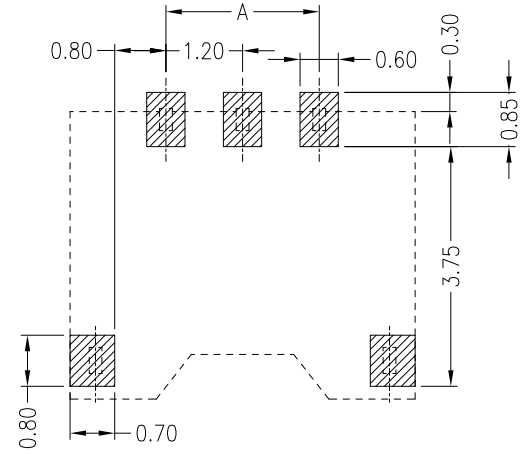


REV	DESCRIPTION	DESIGN	DATE
A	NEW RELEASE	Lingqing	2020/06/22



Specifications:

- Poles:02~10
- Contact resistance:≤20mΩ
- Insulation resistance:≥100MΩ
- Rated voltage:50V AC DC
- Rated current:2.0A AC DC
- Withstand Voltage: 500V AC/minute
- Temperature Range:-25°C~ +85°C
- Housing:PA9T UL94V-0, Black
- Contacts: Phosphor Bronze Matte Sn/Gold
- Solder Tabs:Brass Matte Sn

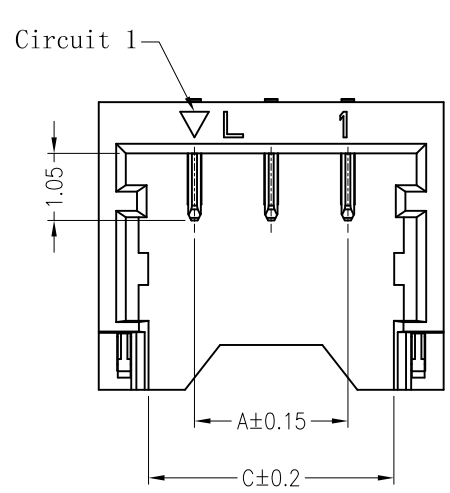


Circuits	Dimensions (mm)		
	A	B	C
02	1.20	4.20	2.64
03	2.40	5.40	3.84
04	3.60	6.60	5.04
05	4.80	7.80	6.24
06	6.00	9.00	7.44
07	7.20	10.20	8.64
*08	8.40	11.40	9.84
*09	9.60	12.60	11.04
*10	10.80	13.80	12.24

ORDER INFORMATION:

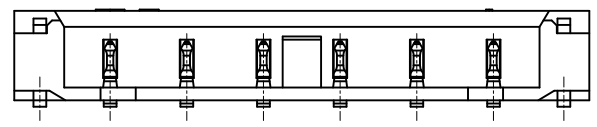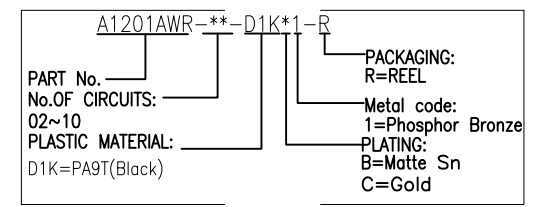

6P With Sticking Point

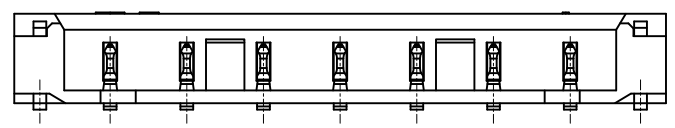

7P~10P With Sticking Point

JKUN 温州健坤接插件有限公司 WENZHOU JKUN CONNECTOR CO.,LTD.		TITLE: 1.20 Pitch Wafer 90° SMT	
GENERAL TOLERANCE		USE: CUSTOMER	PART NO.:
X. ±0.50	X. ±5°	APPD: WangFeng	A1201AWR-**-D1K*1-R
X.X ±0.30	X.X ±2°	CHKD: Shaojinghe	DWG NO.:
X.XX ±0.20	X.XX ±1°	DR: Zenglingqing	JKUN-GCKH-0864
UNITS: mm		SCALE 1 : 1	SHEET 1 / 1