



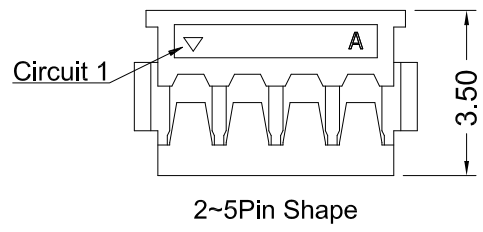
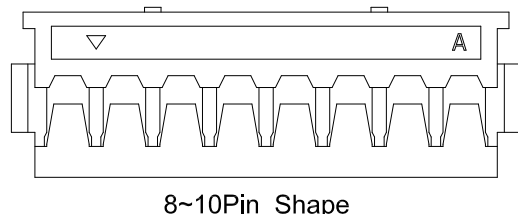
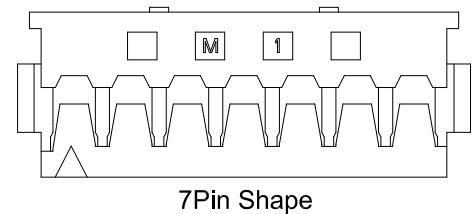
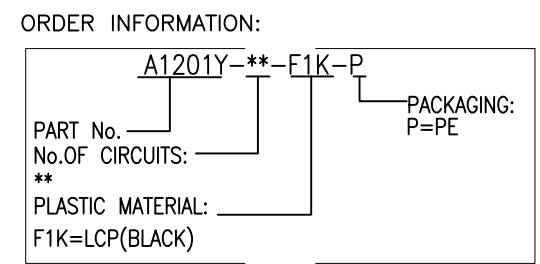
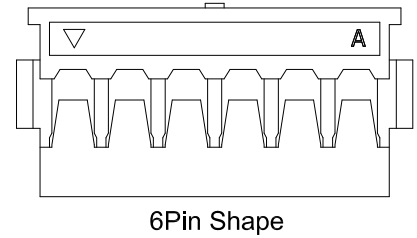


REV	DESCRIPTION	DESIGN	DATE
A	NEW RELEASE	蒋建银	2020/06/25



Poles	Dimensions(mm)		
	A	B	C
2	1.20	2.60	3.10
3	2.40	3.80	4.30
4	3.60	5.00	5.50
5	4.80	6.20	6.70
6	6.00	7.40	7.90
7	7.20	8.60	9.10
8	8.40	9.80	10.30
9	9.60	11.00	11.50
10	10.80	12.20	12.70

**Specifications:**  
 Contact resistance:  $\leq 20m\Omega$   
 Insulation resistance:  $\geq 100M\Omega$   
 Rated voltage: 50V AC DC  
 Rated current: 2.0A AC DC  
 Withstand Voltage: 500V AC/minute  
 Temperature Range:  $-25^{\circ}C \sim +85^{\circ}C$   
 Housing: LCP UL94V-0, Black

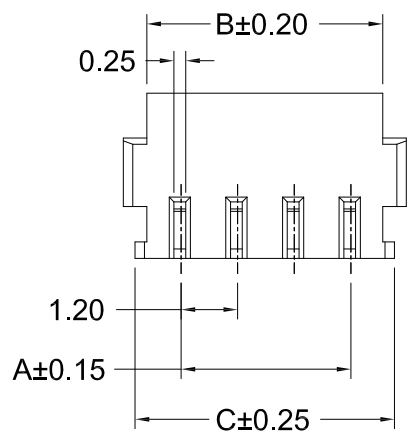

<b>JKUN</b> 温州健坤接插件有限公司 WENZHOU JKUN CONNECTOR CO.,LTD.		TITLE: 1.2mm housing	
GENERAL TOLERANCE		USE: CUSTOMER	PART NO.:
X. $\pm 0.50$	X. $\pm 5^{\circ}$	APPD: 王锋	A1201Y-**-F1K-P
X.X $\pm 0.30$	X.X $\pm 2^{\circ}$	CHKD: 曾令青	DWG NO.:
X.XX $\pm 0.20$	X.XX $\pm 1^{\circ}$	DR: 蒋建银	JKUN-GCKH-0903
UNITS: mm		SCALE 1 : 1	SHEET 1 / 1