
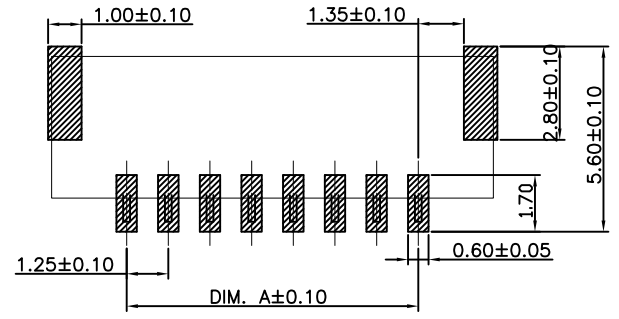



REV	DESCRIPTION	DESIGN	DATE
A0	NEW RELEASE	Wudanping	2015/10/18
A1	Improve the scraping gum	Jiangjianyin	2018/12/30
B	Change the cover	Zenglingqing	2020/03/26




2~6P无此左、右结构  
2~11P无此左、右结构  
2~7P无此左、右结构

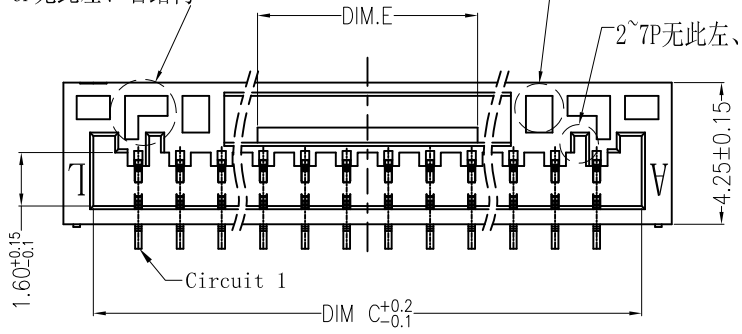

SUGGESTED PCB LAYOUT



**Specifications:**

- Contact resistance: ≤20mΩ
- Insulation resistance: ≥100MΩ
- Rated voltage: 50V AC DC
- Rated current: 1.0A AC DC
- Withstand voltage: 500V AC/minute
- Temperature range: -40°C ~ +110°C
- Housing: LCP UL94V-0, Natural
- CAP: LCP UL94V-0, Natural
- Contacts: Phosphor bronze/Matte Sn
- Solder tabs: Phosphor bronze/Matte Sn

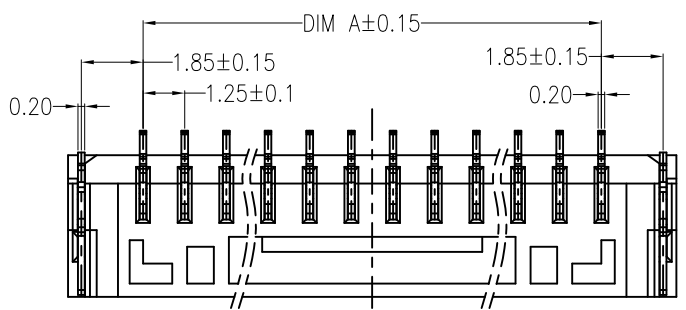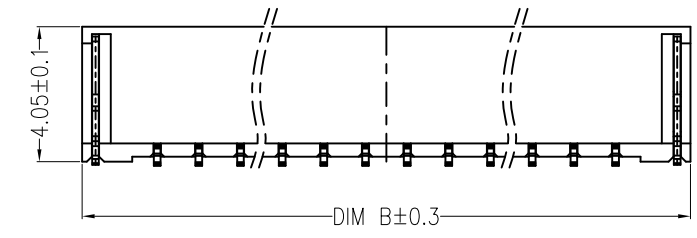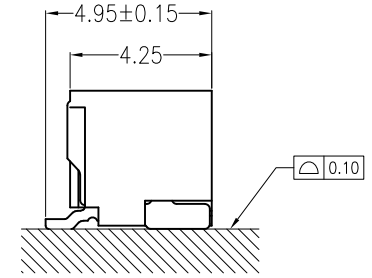

尺寸	DIM A	DIM B	DIM C	DIM E
2P	1.25	5.75	3.75	0.75
3P	2.50	7.00	5.00	1.60
4P	3.75	8.25	6.25	2.65
5P	5.00	9.50	7.50	2.50
6P	6.25	10.75	8.75	4.65
7P	7.50	12.00	10.00	4.65
8P	8.75	13.25	11.25	4.65
9P	10.00	14.50	12.50	4.65
10P	11.25	15.75	13.75	6.60
11P	12.50	17.00	15.00	6.60
12P	13.75	18.25	16.25	6.60
13P	15.00	19.50	17.50	6.60
14P	16.25	20.75	18.75	6.60
15P	17.50	22.00	20.00	6.60

**ORDER INFORMATION:**

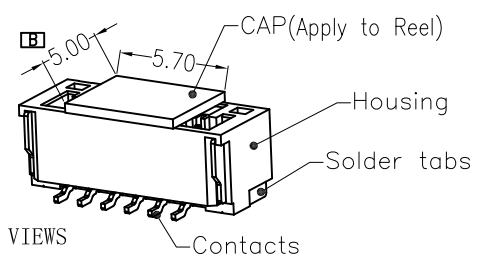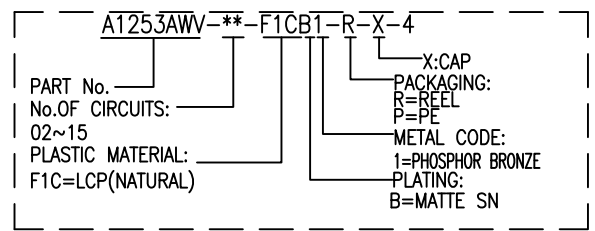

3D VIEWS

**JKUN** 温州健坤接插件有限公司  
WENZHOU JKUN CONNECTOR CO.,LTD.

TITLE:  
1.25mm PITCH 180° WAFER SMT TYPE

GENERAL TOLERANCE	
X. ±0.50	X. ±5°
X.X ±0.30	X.X ±2°
X.XX ±0.20	X.XX ±1°

USE:	CUSTOMER
APPD:	Shaojinghe
CHKD:	Zenglingqing
DR:	Jiangjianyin

PART NO.:	
A1253AWV-**-F1CB1-R-X-4	
DWG NO.:	
JKUN/GCKH-0514	
SCALE	SHEET
1 : 1	1 / 1



UNITS:  
mm