
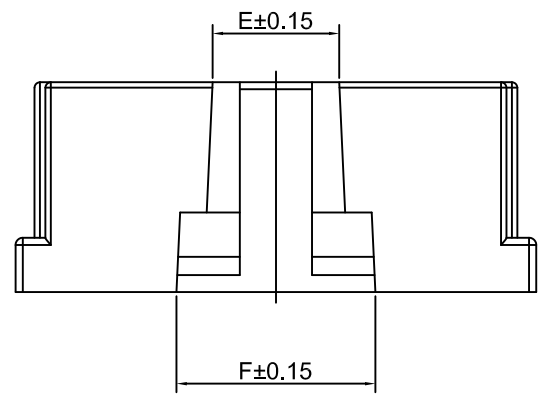
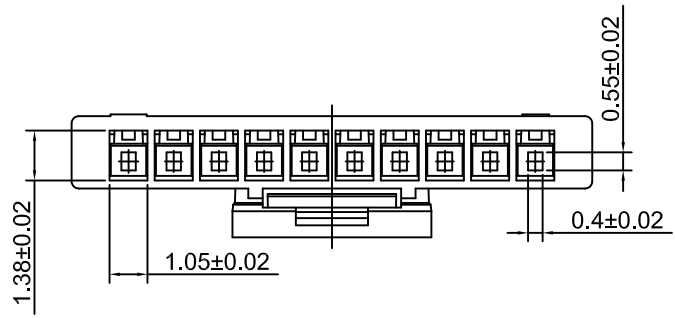

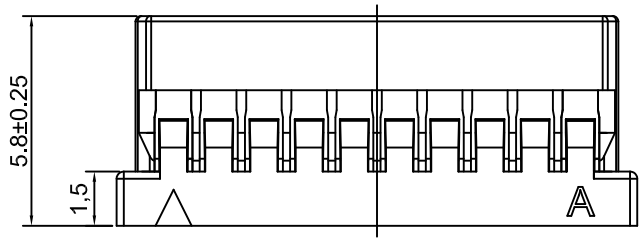


A B C D E F

REV	ECN No.	DESCRIPTION	DESIGN	DATE
A0		Release	蒋建银	2018.03.23

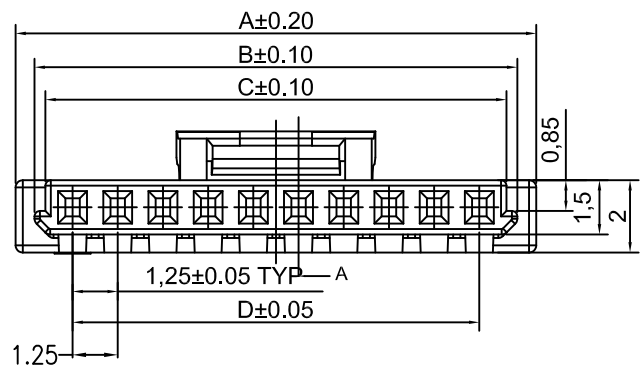


PIN	DIM A	DIM B	DIM C	DIM D	DIM E	DIM F
2P	4.40	3.35	2.75	1.25	1.05	2.65
3P	5.65	4.60	4.00	2.50	2.05	3.75
4P	6.90	5.85	5.25	3.75	3.15	5.15
5P	8.15	7.10	6.50	5.00	3.55	5.25
6P	9.40	8.35	7.75	6.25	3.15	5.25
7P	10.65	9.60	9.00	7.50	3.55	5.25
8P	11.90	10.85	10.25	8.75	3.15	5.25
9P	13.15	12.10	11.50	10.00	3.55	5.25
10P	14.40	13.35	12.75	11.25	3.15	5.25

主要技术参数 Main Specifications

线 数 (Poles): 02 to 10
 接触电阻 (Contact resistance): ≤20mΩ
 绝缘电阻 (Insulation resistance): ≥500MΩ
 额定电压 (Rated voltage): 150V AC DC
 额定电流 (Rated current): 1.0A AC DC
 耐 电 压 (Withstand Voltage): 500V AC/minute
 温度范围 (Temperature Range): -25℃ ~ +85℃

ORDER INFORMATION:

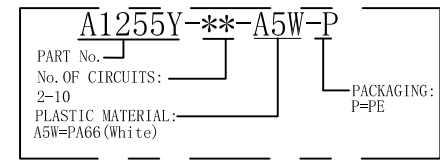

C				
B				
A	HOUSING	1 PCS	PA66	94-V0
ITEM	COMPONENT	Q'TY	MATERIAL	FINISH

JKUN 温州健坤接插件有限公司
 WENZHOU JKUN CONNECTOR CO.,LTD.

TITLE: DF16-**Y
 1.25mmPITCH HOUSING

USE: CUSTOMER
 APPD: 邵敬和
 CHKD: 田峰
 DR: 蒋建银

PART NO.: A1255Y-**-A5W-P
 DWG NO.: -

SCALE: 1 : 1
 SHEET: 1 / 1

A B C D E F