

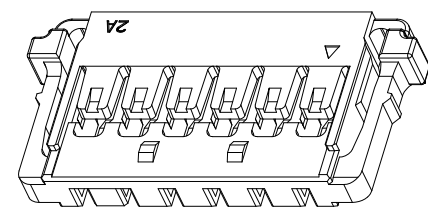
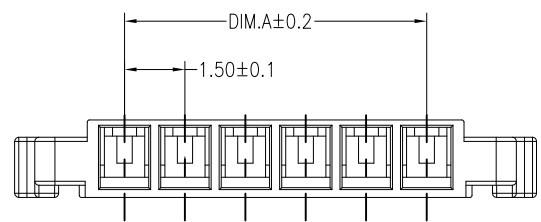


REV	ECN No.	DESCRIPTION	DESIGN	DATE
A0		Release	蒋建银	2018.11.23

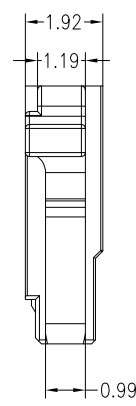

主要技术参数 Main Specifications


线 数 (Poles): 02 to 12
 接触电阻 (Contact resistance): $\leq 20m\Omega$
 绝缘电阻 (Insulation resistance): $\geq 1000M\Omega$
 额定电压 (Rated voltage): 150V AC DC
 额定电流 (Rated current): 3.0A AC DC
 耐 电压 (Withstand Voltage): 500V AC/minute
 温度范围 (Temperature Range): $-25^{\circ}C \sim +85^{\circ}C$

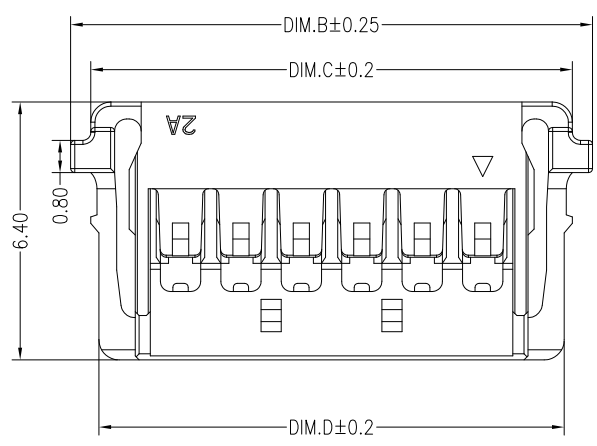

ORDER INFORMATION:

A1503Y--A5K-P**

PART No.	PACKAGING:	P=PE
No. OF CIRCUITS:	PLASTIC MATERIAL:	A5K=PA66 (BLACK)



Poles	Dimensions(mm)			
	A	B	C	D
02	1.50	6.95	5.95	5.55
03	3.00	8.45	7.45	7.05
04	4.50	9.95	8.95	8.55
05	6.00	11.45	10.45	10.05
06	7.50	12.95	11.95	11.55
07	9.00	14.45	13.45	13.05
08	10.50	15.95	14.95	14.55
09	12.00	17.45	16.45	16.05
10	13.50	18.95	17.95	17.55
11	15.00	20.45	19.45	19.05
12	16.50	21.95	20.95	20.55

A	HOUSING	1 PCS	PA66	UL 94V-0, COLOR:BLACK
ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
JKUN 温州健坤接插件有限公司 WENZHOU JKUN CONNECTOR CO., LTD.				TITLE: - 1.5mmPITCH 180°WAFER SMT TYPE
X.±0.5	X.±5'	USE: CUSTOMER	PART NO.: A1503Y-**-A5K-P	
.X±0.3	.X±2'			
.XX±0.25	.XX±1'	APPD: 邵敬和	DWG NO.: JKUN-GCCP-0793	
--	--	CHKD: 田峰		
UNITS: mm		DR: 蒋建银	SCALE 1 : 1	SHEET 1 / 1