
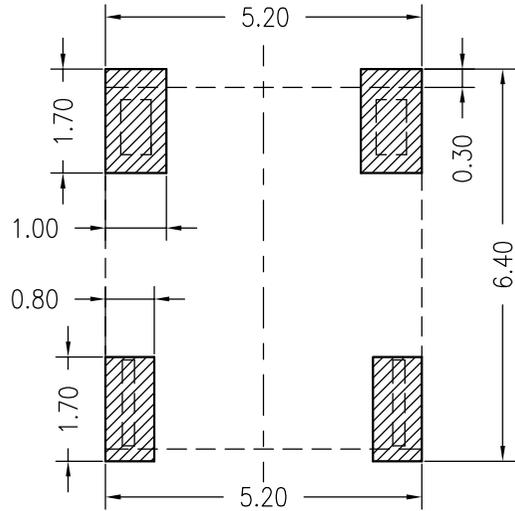
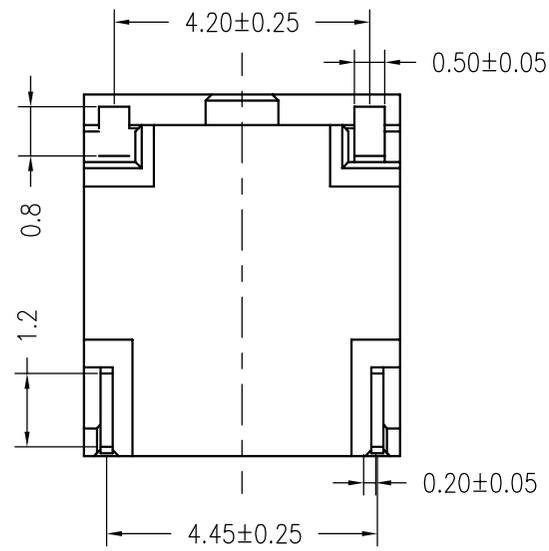

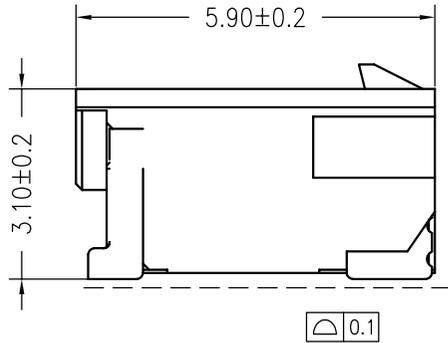



REV	DESIGN	DATE
A0	-	2018.10.26
-	-	-




### 主要技术参数 Main Specifications

- 线 数 (Poles): 02
- 接触电阻 (Contact resistance):  $\leq 10m\Omega$
- 绝缘电阻 (Insulation resistance):  $\geq 1000M\Omega$
- 额定电压 (Rated voltage): 350V AC DC
- 额定电流 (Rated current): 4.0A AC DC (AWG22)
- 耐电压 (Withstand Voltage): 1700V AC/minute
- 温度范围 (Temperature Range):  $-25^{\circ}C \sim +85^{\circ}C$

ORDER INFORMATION:

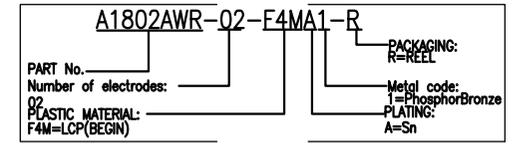

## Board Layout

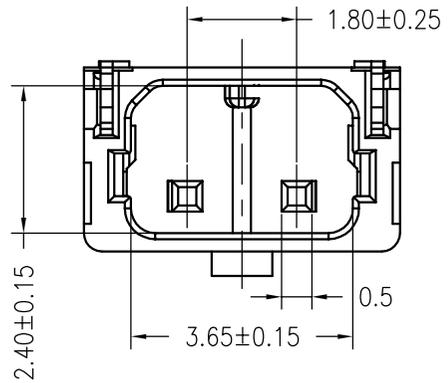

ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
C	SOLDER TAB	2 PCS	PhosphorBronze	Sn-plated
B	CONTACT	2 PCS	PhosphorBronze	Sn-plated
A	HOUSING	1 PCS	LCP	UL 94V-0, COLOR:BEGIN

<b>JKUN 温州健坤接插件有限公司</b> <b>WENZHOU JKUN CONNECTOR CO., LTD.</b>			TITLE: A1802AWR -	
X.±0.5	X.±5'	USE: CUSTOMER	PART NO.:	
.X±0.3	.X±2'		A1802AWR-02-F4MA1-R	
.XX±0.25	.XX±1'	APPD: 邵敬和	DWG NO.:	
--	--	CHKD: 田峰	JKUN-GCCP-0790	
⊕	◁	UNITS: mm	DR: 蒋建银	SCALE: 1 : 1
			SHEET: 1 / 1	