
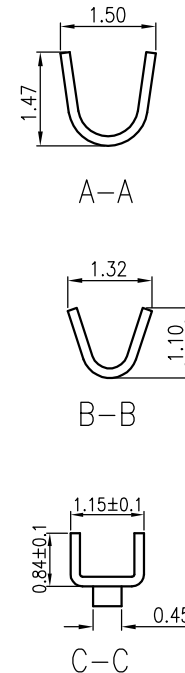
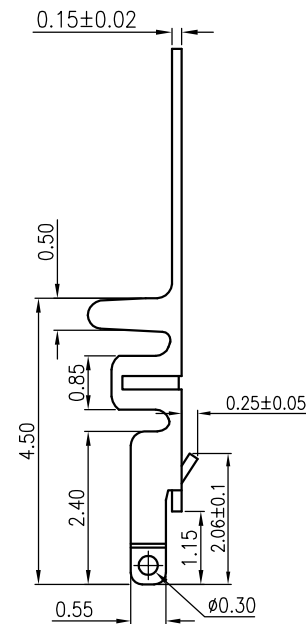


REV	DESIGN	DATE
A0	-	-
-	-	-

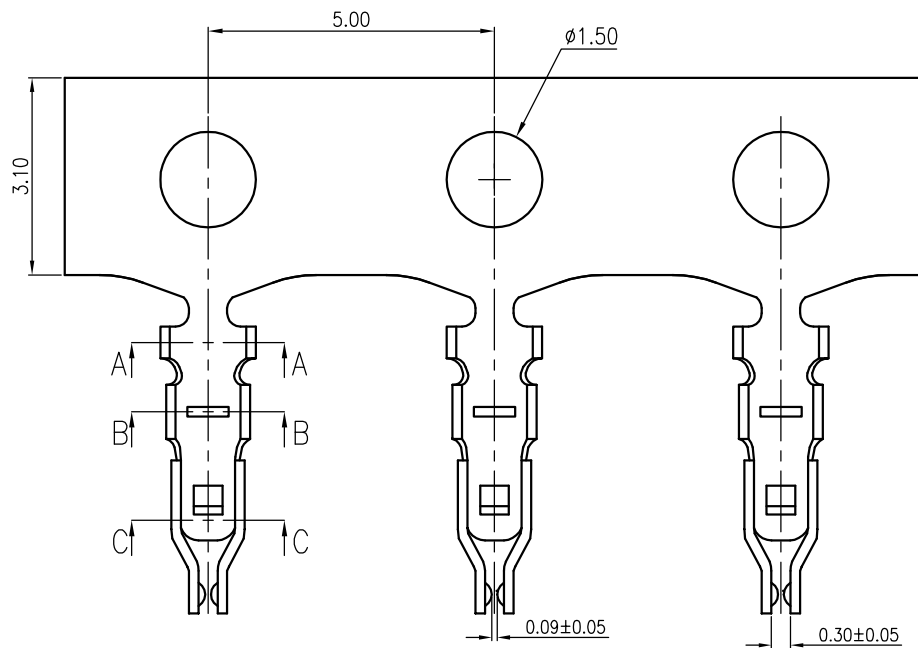

主要技术参数 Main Specifications

- 接触电阻 (Contact resistance): $\leq 20\text{m}\Omega$
- 绝缘电阻 (Insulation resistance): $\geq 1000\text{M}\Omega$
- 额定电压 (Rated voltage): 250V AC DC
- 额定电流 (Rated current): 2.0A AC DC
- 耐电压 (Withstand Voltage): 1000V AC/minute
- 温度范围 (Temperature Range): $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$

Ordering Information & Specification:

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/Reel
A2503T-PA	AWG #26~#30	1.00mm (MAX)	Phosphor bronze	Nickel 20u~60u Over All. T-Tin 80u~120u Over Nickel 6-Gold Flash(0.8u") Over Nickel	/

JKUN 温州健坤接插件有限公司 WENZHOU JKUN CONNECTOR CO.,LTD.			TITLE: -	
X.±0.5	X.±5'	USE: CUSTOMER	PART NO.: A2503T-02端子	
.X±0.3	.X±2'	APPD: 邵敬和	DWG NO.: JKUN-GCDZ-0083	
.XX±0.25	.XX±1'	CHKD: 田峰	SCALE 1 : 1	
--	--	DR: 蒋建银	SHEET 1 / 1	
UNITS: mm				