



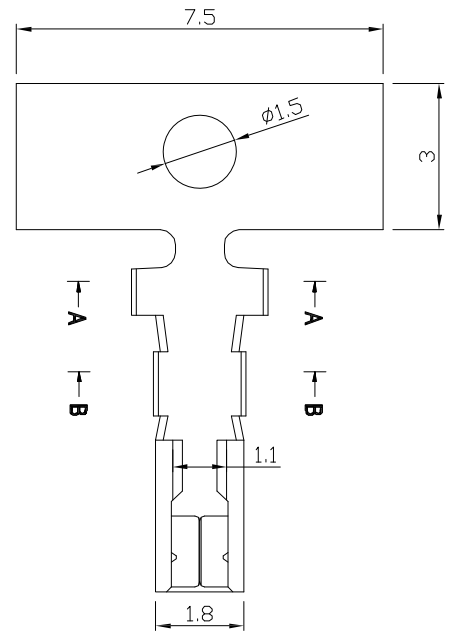


| REV | DESCRIPTION | DESIGN | DATE |
|-----|-------------|--------|------------|
| A0 | NEW RELEASE | 蒋建银 | 2018/03/15 |

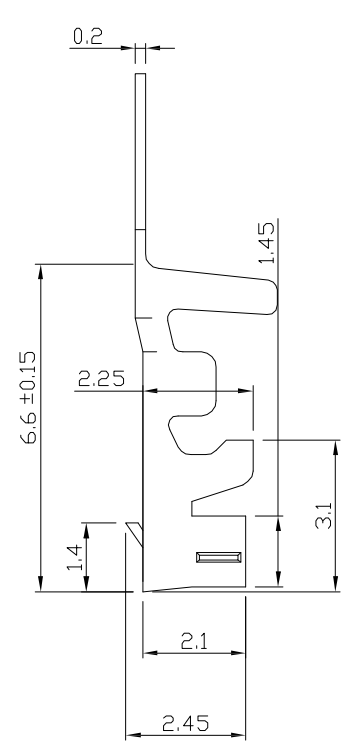

A-A



B-B

Ordering Information & Specification:

| Part No | Wire Range | Insulation O. D. | Material | Finish | Qty/Reel |
|---------|-------------|------------------|-----------------|------------|------------|
| A2507T | AWG #28~#20 | 1.60mm (max) | Phosphor bronze | Tin-plated | 10.000 pcs |

JKUN 温州健坤接插件有限公司
WENZHOU JKUN CONNECTOR CO.,LTD.

TITLE:
XA-T端子

GENERAL TOLERANCE

USE:
CUSTOMER

PART NO.:

X. ±0.50

X. ±5°

APPD: 刘振岭

A2507T-02

X.X ±0.30

X.X ±2°

CHKD: 王亮


DWG NO.:

X.XX ±0.20

X.XX ±1°

DR: 蒋建银

SCALE



UNITS: mm

SHEET

1 : 1

1 / 1