

A

B





C

D

E

F

REV	DESCRIPTION	DESIGN	DATE
A0	Release	吴丹平	2016.04.30

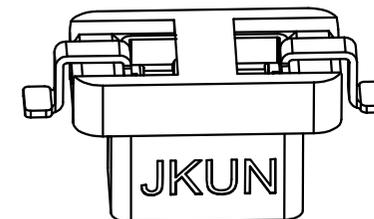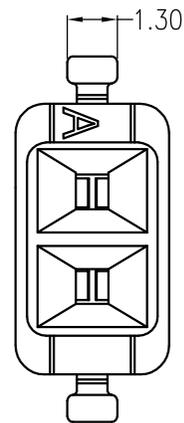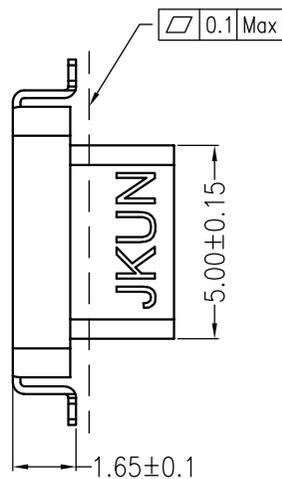
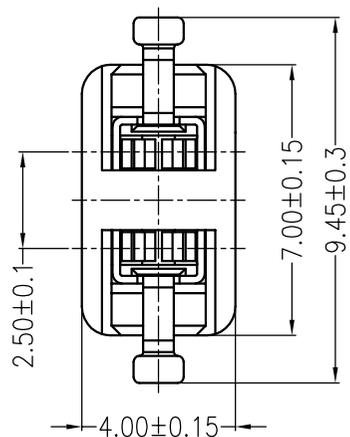


### 主要技术参数 Main Specifications

线 数 (Poles): 02  
 接触电阻 (Contact resistance):  $\leq 20m\Omega$   
 绝缘电阻 (Insulation resistance):  $\geq 1000M\Omega$   
 额定电压 (Rated voltage): 275V AC DC  
 额定电流 (Rated current): 1.0A AC DC  
 耐 电压 (Withstand Voltage): 1500V AC/minute  
 温度范围 (Temperature Range):  $-40^{\circ}C \sim +120^{\circ}C$

### ORDER INFORMATION:

<b>L055AFV-02-F2MB1-R-5</b>			
PART No.			SPECIAL CODE
No. FOR CIRCUITS:	02		5=方孔插针
PLASTIC MATERIAL:	F2M=LCP (BEIGE)		PACKAGING:
			R=REEL
			P=PE
	PLATING:		Metal code:
	B=MATTE Sn		1=Phosphor bronze

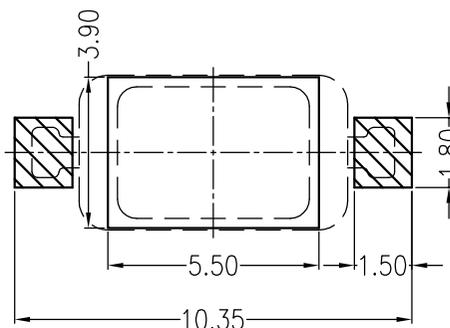

### Board Layout

General Tolerance:  $\pm 0.05$

ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
C				
B	CONTACT	2 PCS	PhosphorBronze	MATTE Sn-plated
A	PEDESTAL	1 PCS	LCP	UL 94V-0, COLOR:BEIGE

**JKUN 温州健坤接插件有限公司**  
**WENZHOU JKUN CONNECTOR CO., LTD.**

TITLE: -  
2.5mmPITCH 180°WAFER SMT TYPE

X.±0.5	X.±5'	USE:	PART NO.:
.X±0.3	.X±2'	CUSTOMER	L055AFV-02-F2MB1-R-5
.XX±0.25	.XX±1'	APPD: 邵敬和	DWG NO.:
--	--	CHKD: 曾令青	JKUN/GCCP-1334
⊕	△	UNITS: mm	SCALE
		DR: 蒋建银	SHEET
			1 : 1
			1 / 1

A

B

C

D

E

F

1

2

3

4

5

1

2

3

4

5