

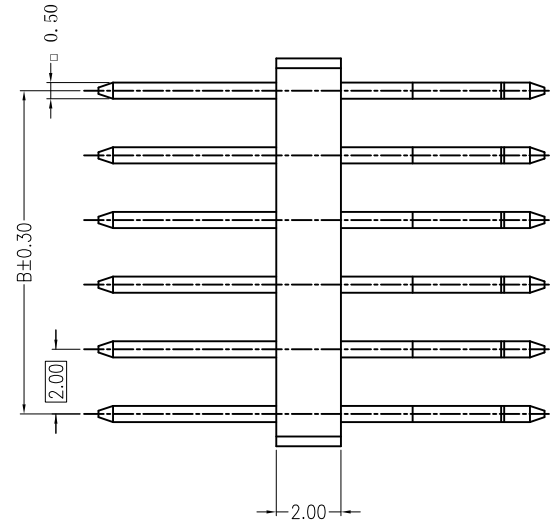


REV	DESCRIPTION	DESIGN	DATE
A	NEW RELEASE	Chenzhiming	2021/08/25

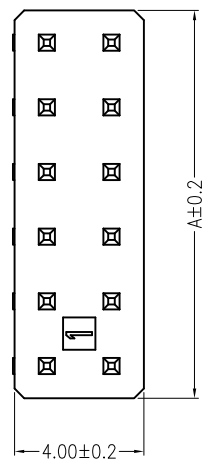


Specifications:


Contact resistance: $\leq 60m\Omega$
 Insulation resistance: $\geq 100M\Omega$
 Rated voltage: 275V AC DC
 Rated current: 1.0A AC DC
 Withstand Voltage: 500V AC/minute
 Temperature Range: $-40^{\circ}C \sim +105^{\circ}C$
 Housing: LCP UL94V-0, Natural (Beige)
 Contacts: Brass/Matte Sn-plated

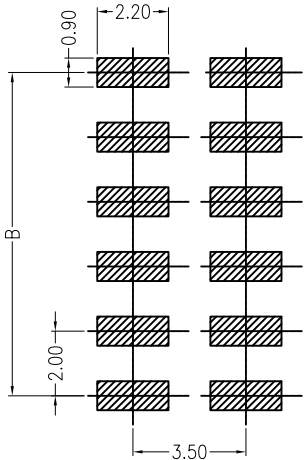

ROMMENDED PCB LAYOUT
 TOLERANCE ± 0.05

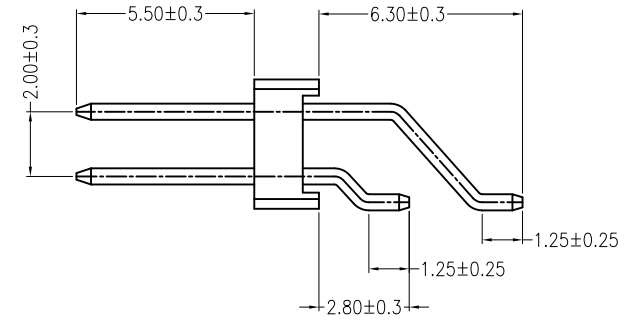

ORDER INFORMATION:

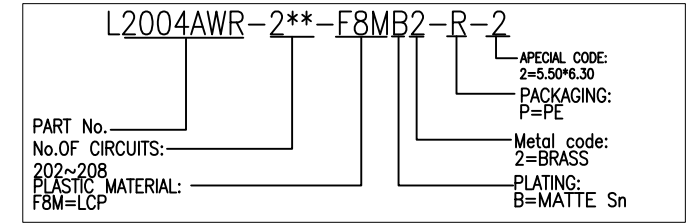

PIN.	DIM A	DIM B
2*2	4.0	2.0
2*3	6.0	4.0
2*4	8.0	6.0
2*5	10.0	8.0
2*6	12.0	10.0
2*7	14.0	12.0
2*8	16.0	14.0

JKUN 温州健坤接插件有限公司
 WENZHOU JKUN CONNECTOR CO.,LTD.

GENERAL TOLERANCE		USE:
X. ± 0.50	X. $\pm 5^{\circ}$	CUSTOMER
X.X ± 0.30	X.X $\pm 2^{\circ}$	APPD: Shaojinghe
X.XX ± 0.20	X.XX $\pm 1^{\circ}$	CHKD: Jiangjianyin
UNITS: mm		DR: Chenzhiming

TITLE: 2.0mm pitch 90°Wafe SMT type	
PART NO.: L2004AWR-2**-F8MB2-R-2	
DWG NO.: JKUN-GCKH-2378	
SCALE 1 : 1	SHEET 1 / 1