
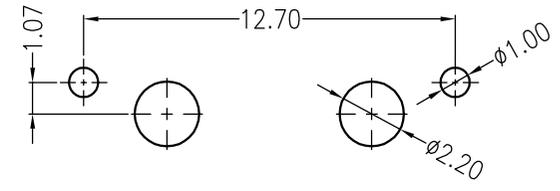
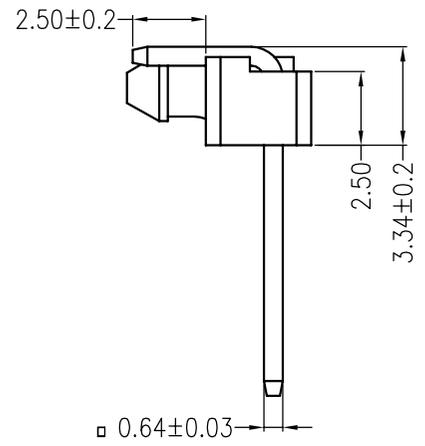


A B C D E F

REV	ECN No.	DESCRIPTION	DESIGN	DATE
A	-	Release	蒋建银	2018.10.25


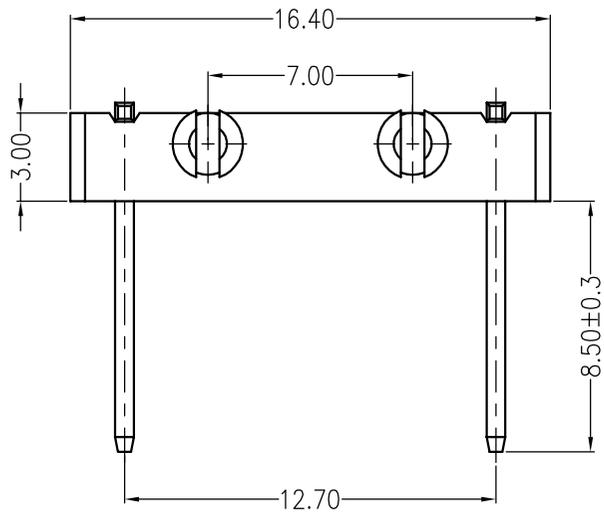


Board Layout
General Tolerance: ±0.05

主要技术参数 Main Specifications

- 接触电阻 (Contact resistance): $\leq 20m\Omega$
- 绝缘电阻 (Insulation resistance): $\geq 1000M\Omega$
- 额定电压 (Rated voltage): 250V AC DC
- 额定电流 (Rated current): 2.0A AC DC
- 耐电压 (Withstand Voltage): 1000V AC/minute
- 温度范围 (Temperature Range): $-25^{\circ}C \sim +85^{\circ}C$

ORDER INFORMATION:

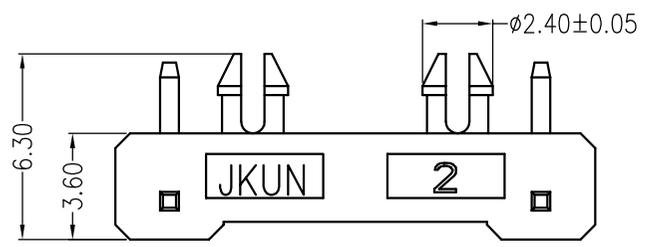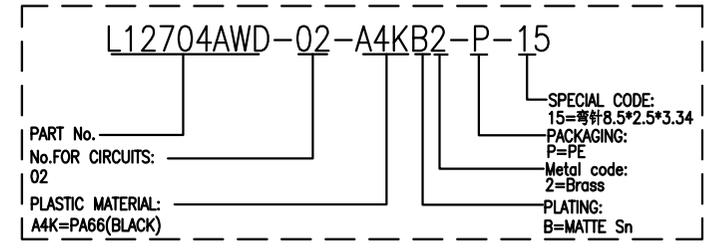

ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
C				
B	CONTACT	2 PCS	Brass	MATTE Sn-plated
A	HOUSING	1 PCS	PA66	UL 94V-0, COLOR:BLACK

JKUN 温州健坤接插件有限公司 WENZHOU JKUN CONNECTOR CO.,LTD.			TITLE: L12704AWD 12.7Pitch 90°wafer dip type	
.X±0.35	X.±	USE: CUSTOMER	PART NO.:	
.XX±0.25	.X±		L12704AWD-02-A4KB2-P-15	
.XXX±0.15	.XX±	APPD: 邵敬和	DWG NO.:	
--	--	CHKD: 田峰	JKUN/GCKH-1242	
⊕	UNITS: mm	DR: 蒋建银	SCALE	SHEET
			1 : 1	1 / 1

A B C D E F

1
2
3
4
5

1
2
3
4