

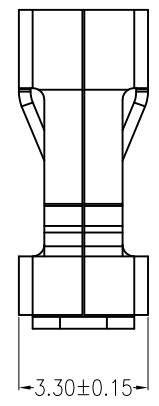
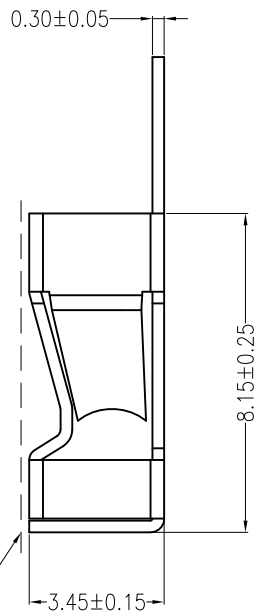


| REV | DESCRIPTION | DESIGN | DATE |
|-----|-------------|------------|------------|
| A0 | NEW RELEASE | Fangsongle | 2019/05/09 |



0.1 Max



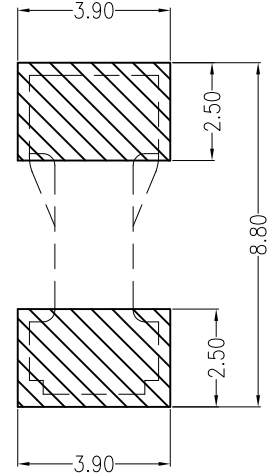


Board Layout

Specifications:

- Contact resistance: ≤20mΩ
- Rated voltage: 250V AC DC
- Rated current: 3.0A AC DC
- Temperature Range: -45°C ~ +125°C
- Contacts: Phosphor Bronze / Matte Sn-plated

ORDER INFORMATION:

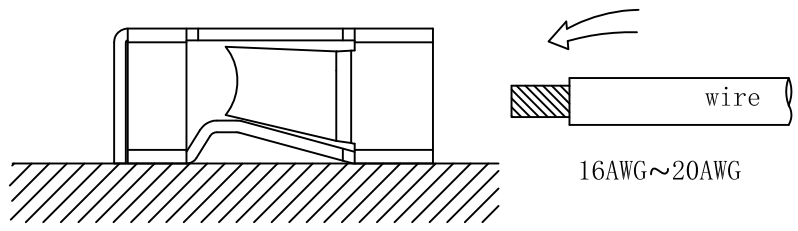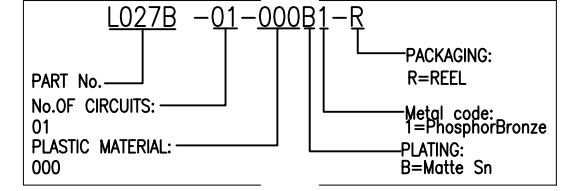

| | | | |
|--|----------|-----------------------|-------------------------------|
| JKUN 温州健坤接插件有限公司 WENZHOU JKUN CONNECTOR CO.,LTD. | | TITLE: - | |
| GENERAL TOLERANCE | | USE: CUSTOMER | PART NO.: L027B-01-000B1-R |
| X. ±0.50 | X. ±5' | APPD: Wangliang | DWG NO.: JKUN-GCKH-2055 |
| X.X ±0.30 | X.X ±2' | CHKD: Liuzhengling | SCALE 1 : 1 |
| X.XX ±0.20 | X.XX ±1' | DR: Fangsongle | SHEET 1 / 1 |
| UNITS: mm | | | |