
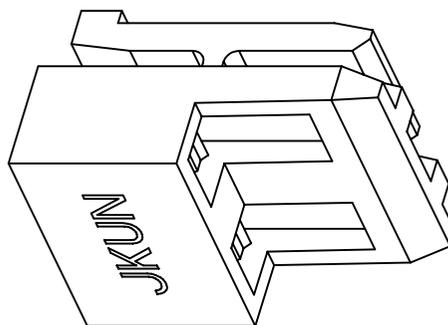
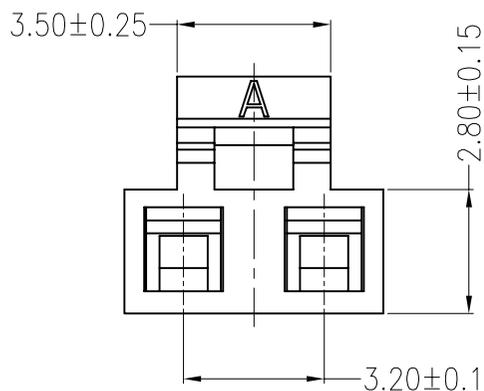
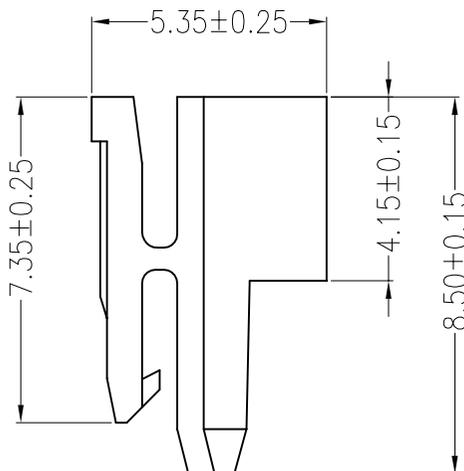


客户料号:

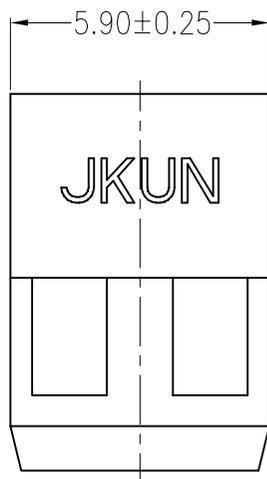

**主要技术参数 Main Specifications**

线数 (Poles): 02  
 接触电阻 (Contact resistance):  $\leq 20m\Omega$   
 绝缘电阻 (Insulation resistance):  $\geq 1000M\Omega$   
 额定电压 (Rated voltage): 250V AC DC  
 额定电流 (Rated current): 2.0A AC DC  
 耐电压 (Withstand Voltage): 1000V AC/minute  
 温度范围 (Temperature Range):  $-25^{\circ}C \sim +85^{\circ}C$

**ORDER INFORMATION:**

<b>L002-02-B1M-P</b>		
PART No.		PACKAGING:
No. OF CIRCUITS:		R=REEL
02		P=PE
PLASTIC MATERIAL:		
B1M=PA46 (BEIGE)		

**JKUN 乐清市健坤接插件有限公司**  
YUEQING JIANKUN CONNECTOR CO., LTD.

APPROVED BY  
邵敬和

UNIT TOLERANCE LTP.  
mm X.X ±0.30 ①

REVISION RECORD

NAME

DATE

NO.

DESCRIPTION


QTY

MATERIAL

PLATING/COLOR

MODEL NO: L002Y-02-B1M-P

CHECKED BY  
胡肖丰



SCALE FULL ANGLE  
X.XX ±0.20 ②  
X.XXX ±0.10 ③

④

DRAWN BY  
张一荣

DATE  
2014.03.18

REVISION  
A/1

⑤

MODEL NAME: 3.20mm PITCH Housing

DwgNo. JKUN/GCCP-0004