
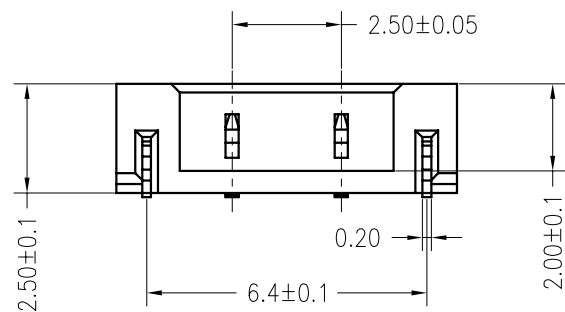
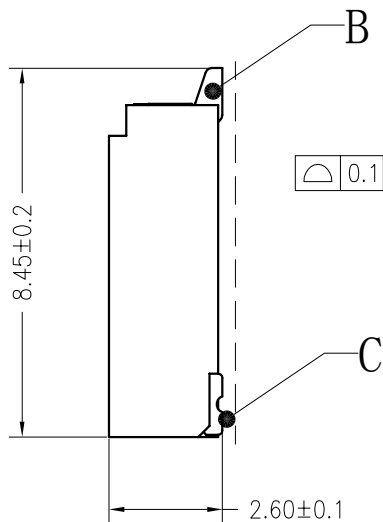
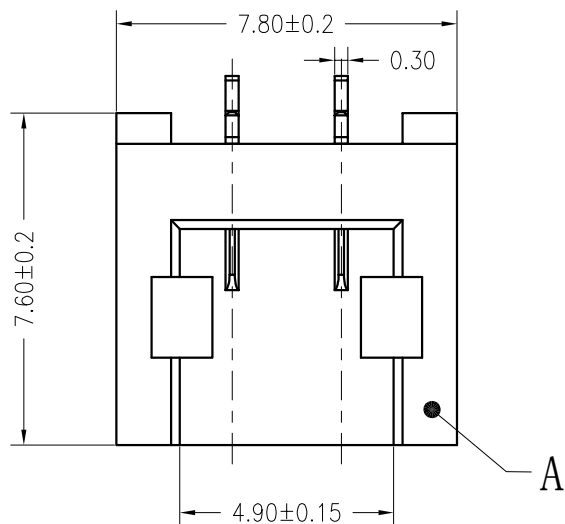


REV	ECN No.	DESCRIPTION	DESIGN	DATE
A0		Release	蒋建银	2017.12.01

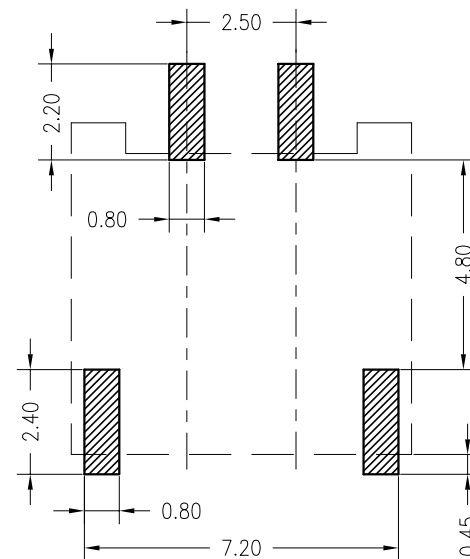

Board Layout

ORDER INFORMATION:

A2503AWR-02-F4MB1-R	
PART No.	PACKAGING: B=PEEL P=PE
Number of electrodes:	Metal code: 1=PhosphorBronze
PLASTIC MATERIAL: F4M=LCP(BEIGE)	PLATING: B=MATTE Sn






主要技术参数 Main Specifications

线 数 (Poles): 02
接触电阻 (Contact resistance): $\leq 20\text{m}\Omega$
绝缘电阻 (Insulation resistance): $\geq 1000\text{M}\Omega$
额定电压 (Rated voltage): 250V AC DC
额定电流 (Rated current): 2.0A AC DC
耐 电 压 (Withstand Voltage): 1000V AC/minute
温度范围 (Temperature Range): $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$

C	SOLDER TAB	2 PCS	PhosphorBronze	MATTE SN
B	CONTACT	2 PCS	PhosphorBronze	MATTE SN
A	HOUSING	1 PCS	LCP	UL 94V-0, COLOR:BEIGE
ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
JKUN 温州健坤接插件有限公司 WENZHOU JKUN CONNECTOR CO., LTD.				TITLE: - 2.5mmPITCH 90°WAFER SMT TYPE
X.±0.5	X.±5°	USE: CUSTOMER		PART NO.: A2503AWR-02-F4MB1-R
.X±0.3	.X±2°	APPD: 谭龙清		DWG NO.: JKUN/GCCP-0741
.XX±0.25	.XX±1°	CHKD: 田峰		SCALE 1 : 1
--	--	DR: 蒋建银		SHEET 1 / 1
		UNITS: mm		

A B C D E F

REV	DESIGN	DATE
A0	—	—
—	—	—

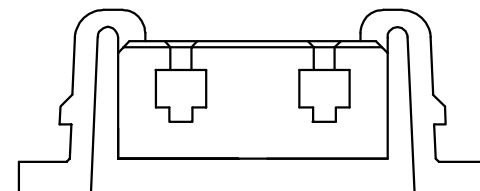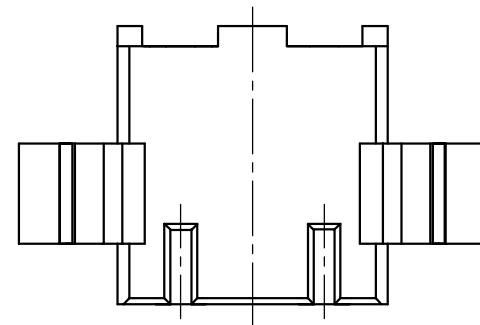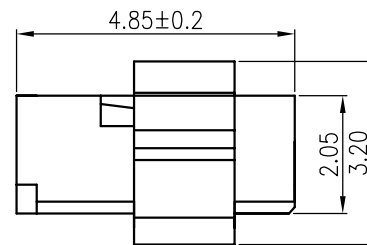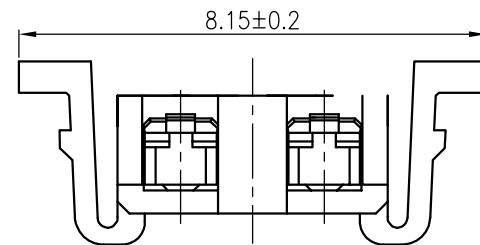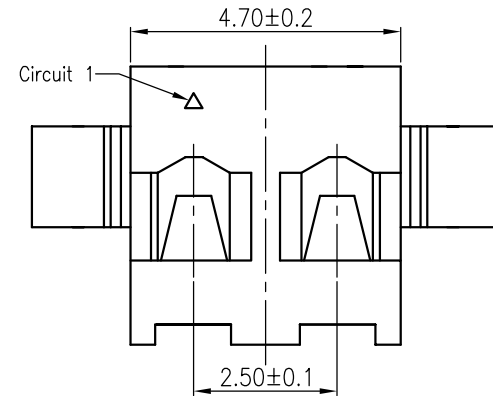

A B C D E F

主要技术参数 Main Specifications

线 数 (Poles): 02

接触电阻 (Contact resistance): $\leq 20\text{m}\Omega$

绝缘电阻 (Insulation resistance): $\geq 1000\text{M}\Omega$

额定电压 (Rated voltage): 250V AC DC

额定电流 (Rated current): 2.0A AC DC

耐 电 压 (Withstand Voltage): 1000V AC/minute

温度范围 (Temperature Range): $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$

ORDER INFORMATION:

A2503Y-02-A5W-P

PART No.


No. OF CIRCUITS:
02

PACKAGING:

P=PE




PLASTIC MATERIAL:

A5W=PA66 (WHITE)







C					
B					
A	HOUSING		1 PCS	PA66	UL 94V-0, COLOR:White
ITEM	COMPONENT		Q'TY	MATERIAL	FINISH
JKUN 温州健坤接插件有限公司 WENZHOU JKUN CONNECTOR CO.,LTD.					TITLE: - -
X.±0.5	X.±5'	USE: CUSTOMER		PART NO.: A2503Y-02-A5W-P	
.X±0.3	.X±2'				
.XX±0.25	.XX±1'	APPD: 邵敬和		DWG NO.: JKUN-GCCP-0794	
--	--	CHKD: 田峰			
	UNITS: mm	DR: 蒋建银		SCALE 1 : 1	SHEET 1 / 1

REV	ECN No.	DESCRIPTION	DESIGN	DATE
A		Release	蒋建银	2018.04.20

产品引出方向

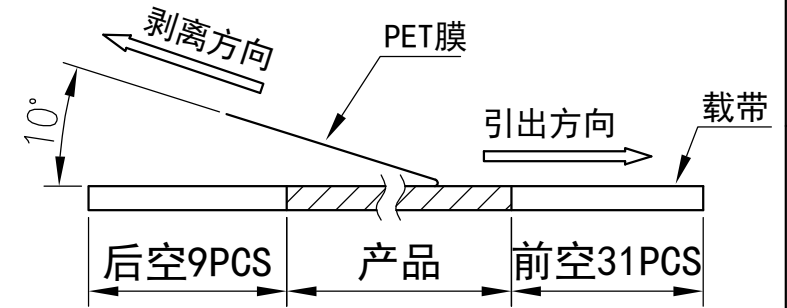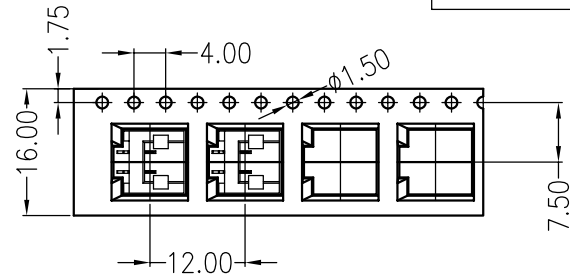


(PET膜剥离示意图)

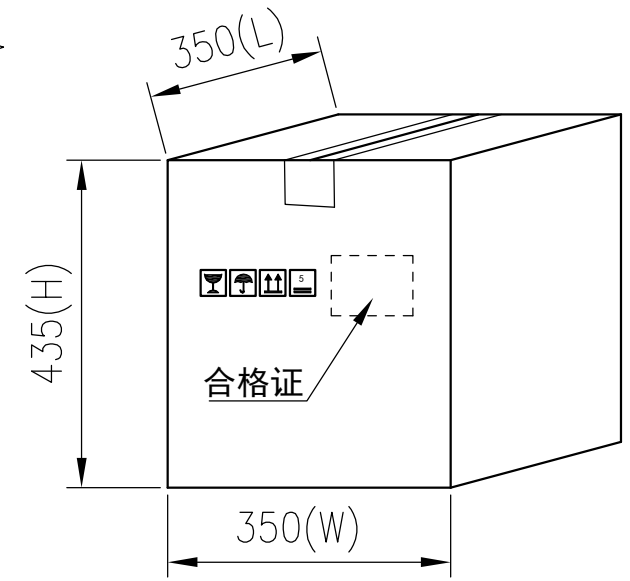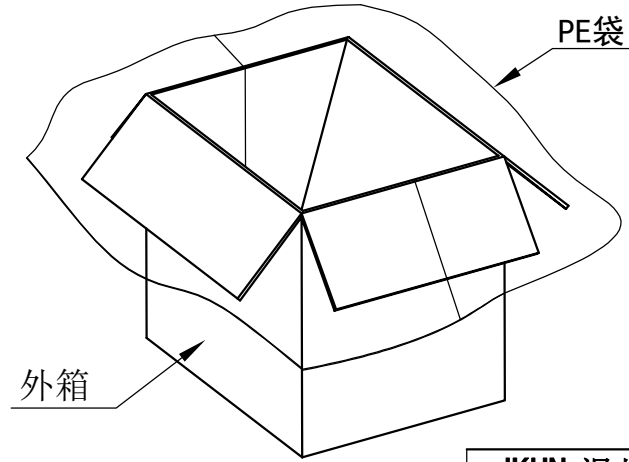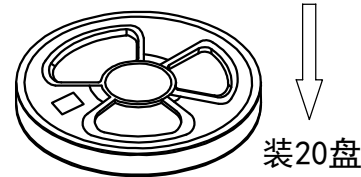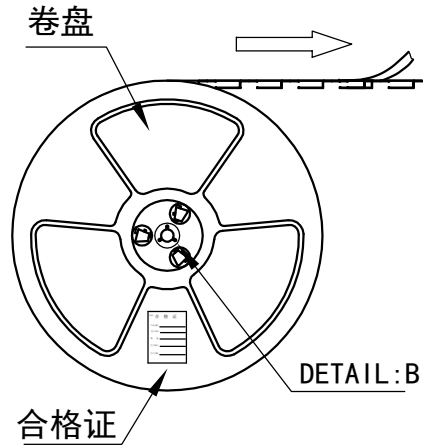

包装说明:

- 把成品包入卷盘中, 每盘装2000PCS, 卷盘上贴上合格证, 将装好产品的卷盘放进外箱中, 外箱内先套一个大PE袋, 外箱上贴贴上合格证.
- 所有材料有害物控制需符合RoHS标准.

JKUN 温州健坤接插件有限公司 WENZHOU JKUN CONNECTOR CO., LTD.				TITLE:	
X.± 0.5	X.±*	USE:	PART NO.: A2503AWR-02 卷装		
.X± 0.3	.X±*	CUSTOMER			
.XX±0.25	.XX±*	APPD: 谭龙清	DWG NO.: JKUN-GCBZ-0741		
--	--	CHKD: 田 峰			
	UNITS: mm	DR: 蒋建银	SCALE 1 : 1	SHEET 1 / 1	

列表一

Circuits	DIM. D	DIM. E	Q'ty/Reel	Packing (Reel/Caton)
02PIN	-	16	2000PCS	20/Reel