


RECOMMENDED PCB LAYOUT(TOP VIEW)
TOLERANCE:±0.05mm

REV	DESCRIPTION	DESIGN	DATE
A	NEW RELEASE	Lingqing	2020/12/03

Specifications:
 Contact resistance: ≤30mΩ
 Insulation resistance: ≥1000MΩ
 Rated voltage: 250V AC DC
 Rated current: 3.0A AC DC
 Withstand Voltage: 800V AC/minute
 Temperature Range: -25°C ~ +85°C
 Housing: LCP UL94V-0, Natural
 Contacts: Brass Sn-plated

Circuits	Dimensions (mm)		
	A	B	C
202 (2X2)	2.50	5.70	7.50
203 (2X3)	5.00	8.20	10.00
204 (2X4)	7.50	10.70	12.50
205 (2X5)	10.00	13.20	15.00
206 (2X6)	12.50	15.70	17.50
207 (2X7)	15.00	18.20	20.00
208 (2X8)	17.50	20.70	22.50
209 (2X9)	20.00	23.20	25.00
210 (2X10)	22.50	25.70	27.50
211 (2X11)	25.00	28.20	30.00
212 (2X12)	27.50	30.70	32.50

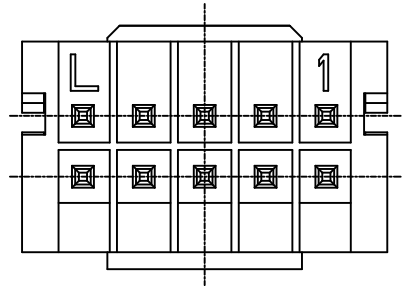

ORDER INFORMATION:
T2508A-2-F1CA2-R-X**

PART No. _____
 No.OF CIRCUITS: _____
 2*2~2*12
 PLASTIC MATERIAL: _____
 F1C=LCP(Natural)


Special code
 X=Cap
 PACKAGING:
 R=REEL
 Metal code:
 2=Brass
 PLATING:
 A=Sn-plated

JKUN 温州健坤接插件有限公司 WENZHOU JKUN CONNECTOR CO.,LTD.		TITLE: 2.5mm pitch 180°Wafe DIP type
GENERAL TOLERANCE		PART NO.:
X. ±0.50	X. ±5°	T2508A-2**-F1CA2-R-X
X.X ±0.30	X.X ±2°	DWG NO.:
X.XX ±0.20	X.XX ±1°	JKUN-GCKH-0916
UNITS: mm	USE: CUSTOMER	SCALE 1 : 1
APPD: Shaojinghe	CHKD: Fangsongle	SHEET 1 / 1
DR: Zenglingqing		

REV	DESCRIPTION	DESIGN	DATE
A	NEW RELEASE	Lingqing	2020/12/03







Specifications:

Contact resistance: $\leq 30m\Omega$
 Insulation resistance: $\geq 1000M\Omega$
 Rated voltage: 250V AC DC
 Rated current: 3.0A AC DC
 Withstand Voltage: 800V AC/minute
 Temperature Range: $-25^{\circ}C \sim +85^{\circ}C$
 Housing: LCP UL94V-0, Natural
 Contacts: Brass Sn-plated

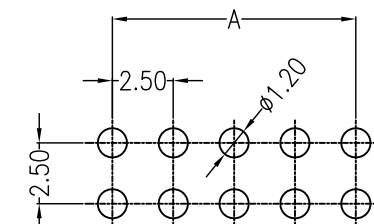


RECOMMENDED PCB LAYOUT(TOP VIEW)
 TOLERANCE: $\pm 0.05mm$

Circuits	Dimensions (mm)		
	A	B	C
202 (2X2)	2.50	5.70	7.50
203 (2X3)	5.00	8.20	10.00
204 (2X4)	7.50	10.70	12.50
205 (2X5)	10.00	13.20	15.00
206 (2X6)	12.50	15.70	17.50
207 (2X7)	15.00	18.20	20.00
208 (2X8)	17.50	20.70	22.50
209 (2X9)	20.00	23.20	25.00
210 (2X10)	22.50	25.70	27.50
211 (2X11)	25.00	28.20	30.00
212 (2X12)	27.50	30.70	32.50

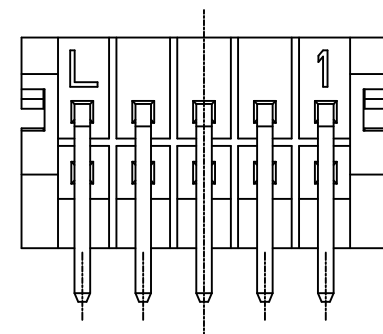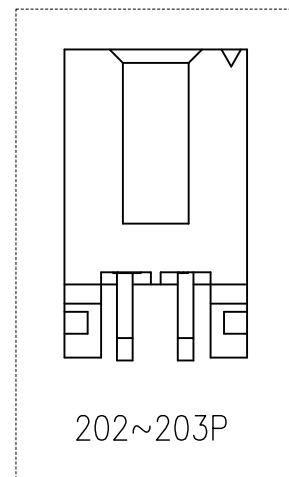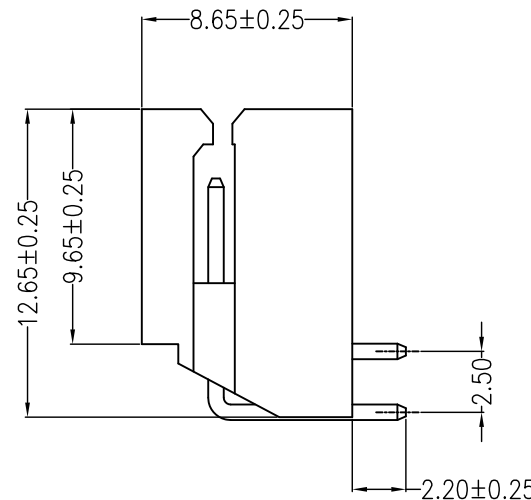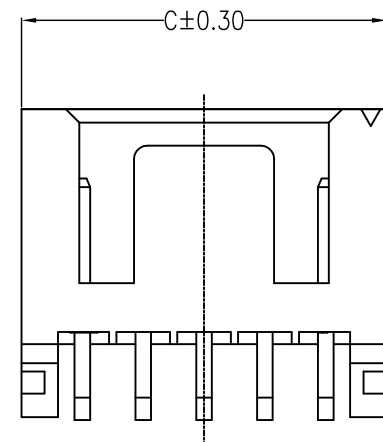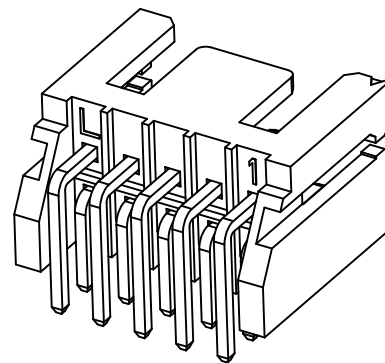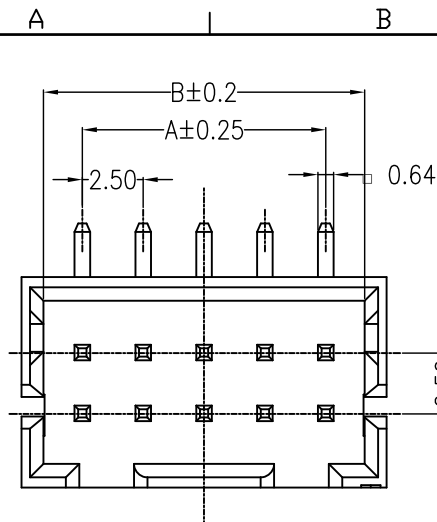

ORDER INFORMATION:

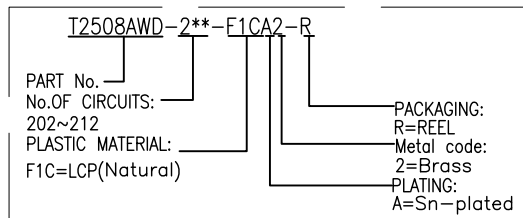

JKUN 温州健坤接插件有限公司 WENZHOU JKUN CONNECTOR CO.,LTD.		TITLE: 2.5mm pitch 90°Wafe DIP type	
GENERAL TOLERANCE		USE: CUSTOMER	PART NO.:
X. ± 0.50	X. $\pm 5^{\circ}$	APPD: Shaojinghe	T2508AWD-2**-F1CA2-R
X.X ± 0.30	X.X $\pm 2^{\circ}$	CHKD: Fangsongle	DWG NO.:
X.XX ± 0.20	X.XX $\pm 1^{\circ}$	DR: Zenglingqing	JKUN-GCKH-0917
		UNITS: mm	SCALE
			1 : 1
			SHEET
			1 / 1