

Assembly Layout



主要技术参数 Main Specifications

- 线 数 (Poles) : 03P
- 接触电阻 (Contact resistance) : $\leq 20m\Omega$
- 绝缘电阻 (Insulation resistance) : $\geq 1000M\Omega$
- 额定电压 (Rated voltage) : 150 V AC DC
- 额定电流 (Rated current) : 1.0A AC DC
- 耐电压 (Withstand Voltage) : 1000V AC/minute
- 温度范围 (Temperature Range) : $-25^{\circ}C \sim +105^{\circ}C$

ORDER INFORMATION:

B1504R-03-F4MB-R

PART No. _____	PACKAGING: _____
No. OF CIRCUITS: _____	R=REEL
03	P=PE
PLASTIC MATERIAL: _____	PLATING: _____
F4M=LCP E6808 (BEIGE)	B=MATTE Sn

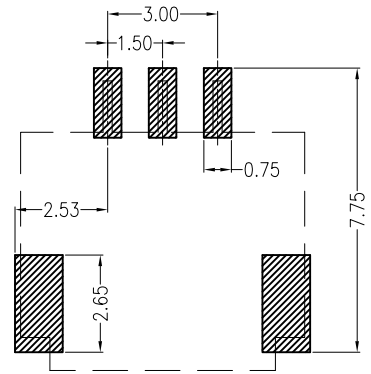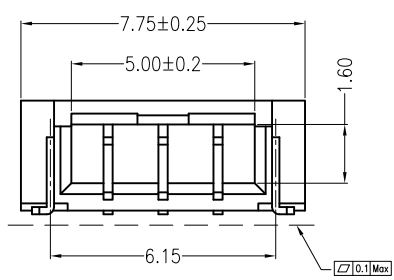

Board Layout
General Tolerance: ± 0.05

C	Solder Tab	2 PCS	PhosphorBronze	MATTE Sn-plated
B	CONTACT	3 PCS	PhosphorBronze	MATTE Sn-plated
A	PEDESTAL	1 PCS	LCP E6808	UL 94V-0, COLOR:BEIGE
ITEM	COMPONENT	Q'TY	MATERIAL	FINISH

JKUN 温州健坤接插件有限公司 WENZHOU JKUN CONNECTOR CO., LTD.			TITLE: - 1.50mmPITCH 90°WAFER SMT TYPE		
X.±0.5	X.±5'	USE: CUSTOMER	PART NO.: B1504R-03-F4MB-R		
.X±0.3	.X±2'				
.XX±0.25	.XX±1'		APPD: 邵敬和	DWG NO.: JKUN/GCCP-0810	
--	--		CHKD: 曾令青		
UNITS: mm		DR: 蒋建银	SCALE 1 : 1	SHEET 1 / 1	